



ACT4P32IS120B

- Line Voltage:120V/60Hz
- Instant Start
- Parallel Lamp Operation
- Active Power Factor Correction

Lamp Type			Min. Start Temp.	Vin (V)	Iin (A)	Pin (W)	ATHD $\leq\%$	PF \geq	CF \leq	BF	BEF	BLE
Type	No.	Watts										
*F32T8	4	32	0/-18	120	0.93	110	20	0.98	1.7	0.88	0.79	0.92
F25T8	4	25	0/-18	120	0.74	89	20	0.98	1.7	0.94	1.06	N/A
F17T8	4	17	0/-18	120	0.51	61	20	0.98	1.7	0.96	1.57	N/A
F40T8	3	40	32/0	120	0.93	112	20	0.98	1.7	0.88	0.79	N/A
F32T8	3	32	0/-18	120	0.79	94	20	0.98	1.7	1.00	1.06	N/A
F25T8	3	25	0/-18	120	0.62	74	20	0.98	1.7	1.04	1.41	N/A

Performance

- Meets ANSI Standard C82.11-2002
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Non-consumer limits

Safety

- No PCB's, Type HL
- UL&cUL listed (Class P, Type 1 Outdoor)
- OCV 600V

Application



- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 131°F,55°C
- Sound Rated: A
- Maximum case temperature Tc: 167°F,75°C

Physical Parameters

Length	9.5"
Width	1.3"
Height	1.1"
Mounting	8.9"
Weight	1.1 lbs

Lead Length

White, Black	25" (± 1 ")
Yellow	46" (± 1 ")
Blue, Red	31" (± 1 ")

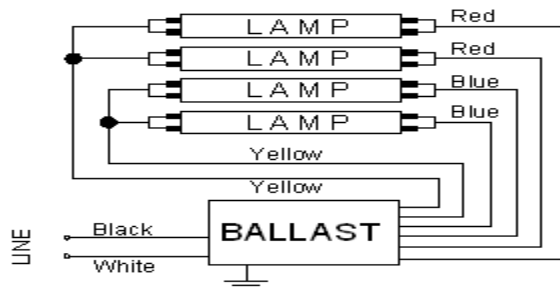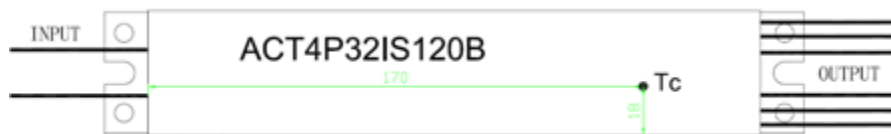

Note: For three lamps application, cap any blue/red lead. Insulate to 600 volts.