



APPLICATION and PERFORMANCE SPECIFICATION

ACT2P75ISUNV

- Line Voltage: 120V/277V 50/60hz
- Instant Start
- Parallel Lamp Operation
- Active Power Factor Correction

Lamp Type			Min. Start Temp. (F/C)	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤	BF	BEF
Type	No.	Watts									
F96T12	2	75	0/-18	120	1.17	137	10	0.98	1.70	0.90	0.66
F96T12/ES	2	60	32/0	120	0.88	105	10	0.98	1.70	0.89	0.85
F72T12	2	55	0/-18	120	0.91	108	10	0.98	1.70	0.92	0.85
F96T12/HO	2	110	32/0	120	1.05	124	10	0.98	1.70	0.58	0.47
F48T12	2	39	0/-18	120	0.61	73	10	0.98	1.70	0.96	1.32
F96T12	1	75	0/-18	120	0.70	84	10	0.98	1.70	0.95	1.13
F96T12/ES	1	60	32/0	120	0.53	63	10	0.98	1.70	0.93	1.47
F72T12	1	55	0/-18	120	0.55	64	10	0.98	1.70	0.96	1.50
F96T12/HO	1	110	32/0	120	0.64	77	10	0.98	1.70	0.64	0.83
F48T12	1	39	0/-18	120	0.39	47	10	0.98	1.70	1.10	2.34
F96T12	2	75	0/-18	277	0.50	135	10	0.98	1.70	0.90	0.67
F96T12/ES	2	60	32/0	277	0.38	103	10	0.98	1.70	0.89	0.86
F72T12	2	55	0/-18	277	0.40	107	10	0.98	1.70	0.92	0.86
F96T12/HO	2	110	32/0	277	0.44	122	10	0.98	1.70	0.58	0.48
F48T12	2	39	0/-18	277	0.27	72	10	0.96	1.70	0.96	1.33
F96T12	1	75	0/-18	277	0.31	83	10	0.95	1.70	0.95	1.14
F96T12/ES	1	60	32/0	277	0.24	63	10	0.95	1.70	0.93	1.47
F72T12	1	55	0/-18	277	0.25	64	10	0.95	1.70	0.96	1.50
F96T12/HO	1	110	32/0	277	0.28	77	10	0.95	1.70	0.64	0.83
F48T12	1	39	0/-18	277	0.18	46	12	0.92	1.70	1.10	2.39

Note: the above data is tested at 60Hz.

Application and Performance Specification Information Subject to Change without Notification.

Performance

Meets ANSI Standard C82.11-2005

Meets ANSI Standard C62.41-2001

Meets FCC Part 18 Class A

Application

Remote Mounting: 18 ft. max. Lead length, 18AWG

Maximum Ambient Temperature: 131°F, 55°C

Sound Rated: A

Maximum case temperature Tc: 194°F, 90°C

Lead Length

White, Black 25" (±1")

Red 79" (±1")

Blue 46" (±1")

Safety

No PCB's, Type HL

UL&cUL listed (Class P, Type 1 Outdoor)

OCV 750V

Physical Parameters

Length 9.5"

Width 1.7"



Height 1.2"

Weight 1.51 lbs

Mounting: 8.9"



APPLICATION and PERFORMANCE SPECIFICATION

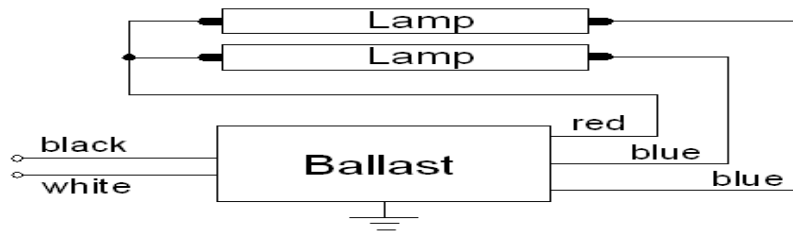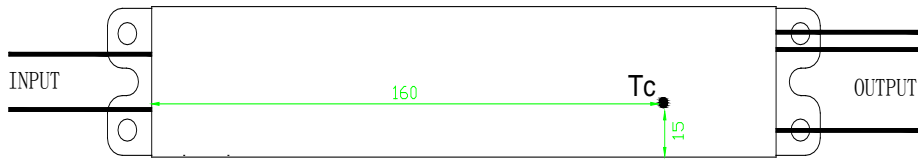

Note: For one lamp application, cap any blue lead. Insulate to 750 volts.