

Product Specification Sheet

SL80-U24 120-277 W

Line Voltage: 120~277Vac 50/60Hz
 Safety Voltage: 108~305Vac 50/60Hz
 Constant Voltage Output
 High Power Factor, Low ATHD
 Output Voltage Tolerance: $\pm 3\%$

RoHS Compliance
 Open Circuit Protection
 Short Circuit Protection
 Max. Output Voltage: 28V
 Tc(max): 80°C
 Ta: -20~50°C

Vin (V)	Iin (A)	PF(λ)	Vout (V)	Iout (mA)	Efficiency	Standby power (W)	Ripple Voltage(pk-pk) (mV)
120-277	0.78-0.34	0.95	24	0~3330	88% @277V	<0.5	960


Application and Performance Specification Information Subject to Change Without Notification

Standards

UL8750
 FCC Part 15 Class A


Safety

No PCB's
 UL
 Sound Rated: A

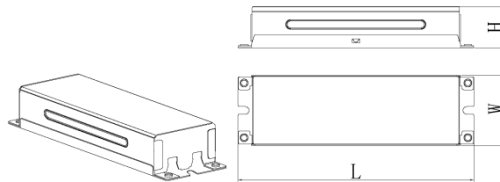

Physical Parameters

Overall Length (L): 9.6" ± 0.1 "
 Width (W): 1.7" ± 0.1 "
 Height (H): 1.18" ± 0.1 "
 Weight: 620g

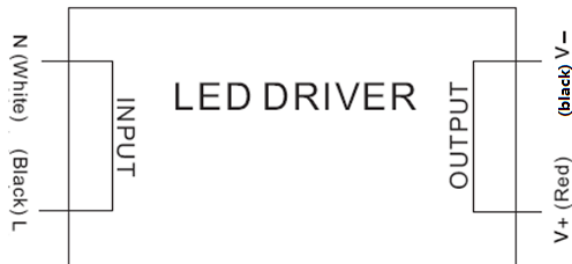

Caution

Install in accordance with the national electrical code; Disconnect power before serving.

Warranty:

Arcata electronics Inc warrants that each LED driver will be free from defects in material or workmanship including replacement for 3 years from the date of manufacture when properly installed and under normal condition use.